

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
20 December 2001 (20.12.2001)

PCT

(10) International Publication Number  
**WO 01/97433 A2**

- (51) International Patent Classification<sup>7</sup>: H04L San Diego, CA (US). SASAKI, Kazuji [JP/JP]; Tokyo (JP). FUKUZAWA, Keiji [JP/JP]; Tokyo (JP).
- (21) International Application Number: PCT/US01/18806
- (22) International Filing Date: 11 June 2001 (11.06.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/593,178 13 June 2000 (13.06.2000) US
- (71) Applicants (for all designated States except US): SONY INTERNATIONAL (EUROPE) GMBH [DE/DE]; Kemperplatz 1, 10785 Berlin (DE). SONY CORPORATION [JP/JP]; 6-7-35, Kitashinagawa, Shinagawa-ku, Tokyo 141-0001 (JP). SONY ELECTRONICS, INC. [US/US]; 1 Sony Drive, Park Ridge, NJ 07656 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BRANKOVIC, Veselin [YU/DE]; Stuttgart (DE). KRUPCEZEVIC, Dragan [YU/DE]; Stuttgart (DE). RATNI, Mohamed [DZ/DE]; Stuttgart (DE). AMIR-ALIKHANI, Hamid [GB/DE]; Stuttgart (DE). KAWASAKI, Kenichi [JP/US];
- (74) Agent: FROMMER, William, S.; Frommer Lawrence & Haug LLP, 745 Fifth Avenue, New York, NY 10151 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 01/97433 A2

(54) Title: WIRELESS TRANSMISSION SYSTEM

(57) Abstract: A wireless transmission system operating in a 60 GHz frequency range comprises fixed hubs (public download server) (2) and mobile terminals (1). The fixed hubs (2) have antennas (4) with a wide angle beam shape. The mobile terminals (1) have antennas (3) with a narrow angle beam shape. The fixed hubs (public download server) (2) are connected by means of a connection line (5) to an information source such as a network backbone or a main server.

BEST AVAILABLE COPY

WO 01/97433

PCT/US01/18806

1

**WIRELESS TRANSMISSION SYSTEM**

The present invention relates to a wireless transmission system operating in a 60 GHz range which can be used for open public applications.

5

The data rate demand for wireless systems is permanently growing due to the variety of now applications. To meet the increased demand of high data rate applications, a new generation of the wireless communication systems is targeted. Due to the common spectrum shortage, the natural way of looking at higher frequencies like those in higher microwave and lower millimeter-wave bands is recommended. Recently the spectrum in a 60 GHz range (a 59 to 64 GHz band) has been allocated for non-licensed applications worldwide. Other non licensed bands are for example the 2.4 GHz ISMband, the 5.8 GHz band and the 24 GHz band.

15 Background information can be found in L. Fernandes, „Developing a System Concept and Technologies for Mobile Broadband Communications", IEEE Personal Communication Magazine, February 1995.

20 The following European patent applications of Sony International (Europe) GmbH relate to technologies which can be applied for a transmission in said 60 GHz non-licensed frequency band:

- EP 0 969 602 A1 relating to a TX/RX structure for a dual frequency mode,
- EP 1 006 668 A1 relating also to a dual frequency band transceiver,
- 25 - EP 0 889 543 A1 relating to a wideband printed dipole antenna for microwave and millimeter-wave applications,
- EP 0 920 074 A1 relating to a circular polarized planar printed antenna concept with shaped radiation pattern,
- EP 0 889 542 A1 relating to a wideband printed phase array antenna for
- 30 microwave and millimeter-wave applications.

In view of the above-cited prior art it is the object of the present invention to propose a wireless transmission system designed for a transmission of data in the 60

WO 01/97433

PCT/US01/18806

2

GHz range tearing advantage from the fact that said 60 GHz range is a non-licensed frequency band and from the specific propagation properties (high attenuation, oxygen absorption).

5 According to a first aspect of the present invention a wireless transmission system designed for the transmission of data in the 60 GHz range comprises a public download server connected to a network backbone or a main server and a mobile terminal provided with a narrow beam antenna.

10 The communication range can be limited to 20 meters or less.

The public download server can be connected to a broadband data highway and/or a main server by means of an optical cable.

15 The public download server can be connected to a broadband data highway or a main server by means of a wireless point-to-point connection.

The public download server can be connected to a broadband data highway or a main server by means of a point-to-multipoint wireless local loop connection.

20

The public download server and the mobile terminal can be designed for a dual frequency operation, one transmission frequency being in the 60 GHz range and a second transmission frequency being an intermediate frequency in a range below the 60 GHz range,

25

The public domain server can be provided with a wide angle beam antenna.

The public domain server can be provided with an antenna having a kidney shaped beam in cross section.

30

According to a further aspect of the present invention a wireless transmission system designed for the transmission of data in the 60 GHz range is proposed, the system

WO 01/97433

PCT/US01/18806

3

comprising a teed hub provided with a wide angle beam antenna and a mobile terminal provided with a narrow beam antenna.

According to a still further aspect of the present invention a wireless transmission  
5 system designed for the transmission of data in the 60 GHz range is provided, the system comprising at least two mobile terminals respectively provided with a narrow angle antenna for communication with each other.

According to a still further aspect of the invention a wireless transmission system is  
10 proposed comprising a plurality of public access server and at least one mobile terminal, The mobile terminal is designed to upload/download content from the public access server by means of a wireless transmission and the public download server all operate with the same transmission frequency in a non-licensed frequency band.

15 The communication between the mobile terminal and respectively a public access server is preferably free of charge. The uploading/downloading of content can be charged to the user of the mobile terminal.

20 Preferably there is no hand-over between adjacent public access server.

According to a still further aspect of the invention, a method for uploading and/or downloading content from a public access server to/from mobile terminals over an air interface is proposed. The air interface uses a non-licensed frequency band and  
25 the transmission itself is free of charge. The user of a mobile terminal is charged for uploading/downloading content. Preferably a service provider is owner of the public access server.

The public access server can be installed in a large hall environment, in public  
30 vehicles, facing sidewalks, and/or at gas stations or traffic lights.

WO 01/97433

PCT/US01/18806

4

Further advantages, features and objects of the present invention will become evident for the man skilled in the art when reading the following detailed description of embodiments taken in conjunction with the figures of the enclosed drawings.

5 Figure 1 shows a 60 GHz public access system application scenario;

Figure 2 shows a 60 GHz public access system application scenario applied for underground and trains;

10 Figure 3 shows a 60 GHz public access system application scenario for large rooms (airport, train station, ...);

Figure 4 shows public download server antenna diagram requirements for open public access applications (streets, etc.);

15

Figure 5 shows public download server antenna diagram requirements for trains, underground and large room environments; and

20 Figure 6 shows a universal terminal as one embodiment of a mobile terminal according to the present invention.

With reference to figures 1, 2 and 3 different environmental scenarios for the application of the present invention will be explained.

25 Generally the present invention is targeting solutions for urban areas like town environments shown in figure 1. Users having a mobile terminal 1 can communicate by means of a wireless transmission in the 60 GHz range and optionally other ranges below said 60 GHz range with fixed hubs 2. The fixed hubs 2 are public access server. Furthermore, two mobile terminals 1 can communicate with each other in the  
30 60 GHz range for example to perform wireless games.

The communication of a mobile terminal 1 with the fixed hub 2 can be used, for example for a fast downloading of video within a short time period on a storage unit

WO 01/97433

PCT/US01/18806

5

(for example hard disc) within the mobile terminal 1. Alternatively, contents of news information centers can be downloaded or video e-mail can be exchanged with the fixed hub 2.

- 5 Note that the fixed hubs 2 are respectively linked to an information source such as a broadband data highway 22 (for example a ATM fixed backbone) or a main information server 23 by means of a fixed connection S or a wireless transmission 6. Note that the mobile terminals 1 are respectively provided with an antenna means 3 with a narrow shaped beam. The fixed hubs 2 are respectively provided with an  
10 antenna d having a wide angle beam shape. The communication range between respectively a fixed hub 2 and a mobile terminal 1 or between two mobile terminals 1 is for example about 20 meters maximum.

- Figure 2 shows the application of a wireless transmission system according to the  
15 present invention in public transportation means such as underground or trains. On the ceiling 16 of a wagon 17 fixed hubs 2 are provided. These hubs are respectively connected by means of a connection line S to a central data server 7. Users within the wagon 17 having a mobile terminal 1 can communicate, with the fixed hubs 2 while commuting in the wagon 17. Furthermore a gateway 8 having an interface  
20 function is provided which is connected to the central data server 7 of the wagon 17 and which serves for updating the content of the central data server 7.

- Figure 3 shows the application of the present invention in public indoor environment such as airports, railway stations, department and convenient stores. Generally this  
25 application relates to the wireless communication within a large hall 19. Again, a fixed hub 2 connected to an information source by means of a connection line 5 is provided on the ceiling 16 of the hall 19. The user can communicate with the fixed hub 2 by means of the antenna 3 of the mobile terminal 1 of the user.

- 30 The fixed hubs 2 being fixed axis stations for the communication are preferably public download servers (PDS). The mobile terminals will be distinguished in so-called universal terminals (UT) and terminal with the reduced functionality (TRF).

WO 01/97433

PCT/US01/18806

6

The fixed hubs and preferably the PDS units can be connected to a information source by different means:

- 5 According to a first alternative the PDS units are connected by means of a fixed connection 5 (for example a optical cable) to a broadband data highway 22, (for example an ATM fixed backbone) or a main information server 23 containing the source of information.
- 10 According to a second alternative the PDS unit is connected by means of a point-to-point fixed wireless connection 6 to a broadband data highway 22 or a main information server 23 containing the source of information.

- According to a still further alternative the PDS unit is connected by a point-to-multi-
- 15 point wireless local loop (WLL) connection to the broadband data highway 22 or a main information server 23 containing the source of information.

- The fixed hub or PDS unit 2 contains a memory block (reference 20 in figure 1) which may be updated by placing a new (updated) memory block in the PDS unit by
- 20 a service provider. This can be done for example by placing a memory stick with a large memory.

- With reference to figures 4 and 5 the wide angle radiation beam of the antennas 4 of the fixed hubs 2 will be explained. The mobile terminals 1 generally have a narrow
- 25 angle beam shape.

The radiation beams of the antennas 4 of the fixed hubs 2 generally have linear or circular polarization.

- 30 Figure 4 shows PDS antenna diagram requirements for street applications. For this scenario the radiation beam of the fixed hubs (PDS) 2 can be like alternatively shown in figures 4a and 4b in a top view, wherein the uniform coverage provided by the alternative according to figure 4b is preferred. The radiation beam according to

WO 01/97433

PCT/US01/18806

7

the embodiment of figure 4b can be described as having a kidney like cross section when seen from above. Besides a uniform coverage this solution offers an extension of the communication range. Therefore, when using the alternative as shown in figure 4b for a larger communication distance the antenna gain is larger and for a smaller communication distance the antenna gain is smaller. This allows an optimization of the transmission power and therefore a reduction of the requirements on the AGC (autocratic gain control) of the receiver in the mobile terminal 1.

Figure 5 shows PDS antenna diagram requirements for train, underground and/or large hall environments in which the public download server (PDS) is preferably placed on the ceiling. Preferably the radiation pattern having a top view according to figure 4b is preferred, as it offers uniform coverage solution and an extension of the communication range.

The data rate for the communication of the PDS units with their information source (data highway or main server) may be smaller compared to the communication rate between the fixed hubs (PDS) and the mobile terminals or between two mobile terminals. Optionally the PDS unit can be only a video server or it is connected to a main video server and provides only content coming from the main video server.

With reference to figure 6 a mobile terminal 1 according to the present invention will be explained. The mobile terminals 1 respectively have an antenna 3 providing a "pencil" like beam shape (high gain antenna) with linear or circular polarization.

The mobile terminal 1 can be provided with a camera 9, an optional front end for other wireless systems (for example bluetooth 21), a screen 10 capable of DV playback, a microphone 11, headphone sockets 12, a connection plug 13 for game joysticks, a touch screen 14 and a memory 15 able to store more than one full-time high-quality video.

The antenna 3 can be integrated in a front end consisting of the highway antenna 3 and a RF front end.



WO 01/97433

PCT/US01/18806

8

Additional integrated (or output to external) wireless connection radio front ends can be provided having an operation frequency lower than 60 GHz, whereby the operation frequency is not an intermediate frequency of the 60 GHz front end.

- 5 Figure 6 shows a mobile terminal 1 with maximum functionality. Furthermore, a terminal with reduced functionality (TRP) can be used. A TRF has only content decoder, control units and man/machine interfaces as for example a portable MP3 player or a portable DVD player. As a further alternative the TRF may only have a control unit and a man/machine interface as for example a simple display or an  
10 earphone.

- The communication data rate between a PDS unit and a mobile terminal and between two mobile terminals, respectively, exceeds 50 Mbit/s (user data rate) and is preferably larger than 100 Mbit/s. In an ideal case the communication data rate is  
15  $n \cdot 100$  Mbit/s, whereby  $n$  is an integer larger than 1. Lower data rate modes can also be provided especially in conjunction with the terminal with reduced functionality.

- Both TDMA and FTMA access is allowed. The modulation schemes can be chosen arbitrarily as long as they can cope with very high data rates. The modulation  
20 scheme can be for example OFDM based and optionally the bandwidth is a multiple of the 20 MHz OFDM bandwidth.

- All fixed hubs and mobile terminals are optionally designed to have an intermediate frequency in the 5 GHz range (non-licensed and ISM industrial scientific medical  
25 band) to provide a dual frequency operation in the 5 GHz and 60 GHz range.

- Optionally all fixed hubs and mobile terminals are designed to have an intermediate frequency in the 2,4 GHz range (ISM band) to provide a dual frequency operation in the 2,4 GHz and 60 GHz range.

30

WO 01/97433

PCT/US01/18806

9

**NETWORKING AND PROTOCOLS**

Communication protocol requirements between PDS and UT (or TRF), or between UT (or TRF) and other UT (or TRF):

5

- has LESS complexity compared to classic WLAN protocols, or classic Cellular system protocols,
- it may allowed only simple download in restricted operation scenario,
- they do not necessarily support handover,
- 10 • they are not necessarily the same as communication protocols between the PDS unit and data highway or main data server, and by the rule they have less complexity,
- PDS unit may have a means to terminate more complex communication protocol between PDS and data highway and communicate with BUT (or TRF) by the simpler protocol definition,
- 15 • Optionally, protocol between PDS and UT (or TRF) supports MPEG streaming all more than one MPEG standard,
- Optionally protocol stack between PDS and UT (or TRF) supports IP.

20 **ADVANTAGES OF THE PROPOSED SYSTEM COMPARED TO KNOWN SYSTEMS**

1. Advantages of the proposed public systems are:

- usage of the non-licensed band in 59-64 GHz range offering, a large spectrum and very large data rates, they are not available to provide to the users,
- 25 - due to the non-licensed band, there is no need to pay operation licenses locally, so that everyone may be operator, and cover those areas, which are for operate consider as profitable, mainly only common standard,
- 30

WO 01/97433

PCT/US01/18806

10

- due to very large data rates available a new prospective of applications are opened which are fully complementary to so-called 3G and 4G mobile communication systems, so proposed systems may be considered as a new business opportunity, also for those companies making 2G, 3G and in future 4G business.  
5
- due to the large frequency of the operation the total front end size and antenna size may be very small and very easy to be integrated in various types of terminals: \* beginning from current PDA types -of terminals, through so-called 2G and 3G to the future UT (or TRF) terminal,  
10
- due to the large frequency and large attenuation, small transmission power, and specified UT antenna pattern, as well as large oxygen absorption frequency RE-USE may be easily adopted, so there is almost unlimited possibility of providing very large wireless data rates in very small environments, Density and Capacity of the system is almost unlimited, in contrast to so-called 3G and future 4G systems.  
15
- proposed concept does not need to have smart backbone infrastructure like cellular systems, it is much more simpler, there is no handover between different fixed hubs and the same transmission frequency can be reused efficiently,  
20
- proposed concept has much lower complexity compared to the WLAN (wireless local area network) approach.  
25

#### POTENTIAL APPLICATIONS

The basic business related ideas are:

- 30 a) wireless communication access is free of charge,
- b) payment only for specific content (e.g. video, audio, newspapers, game downloading, gaming),
- c) the key operation mode is downloading,

WO 01/97433

PCT/US01/18806

11

- d) sending and receiving private information (E-mails, video E-mails, documents, profiles) is in principle free of charge,
- e) gaming from one UT to another UT, as well as gaming from, UT with PDS Is free of charge,
- 5 f) some charges may be applied for real time, delay sensitive, applications like video and audio telephony,

***Application Examples:***

- 10 a) User downloads a high quality video content from PDS within couple of minutes (data rates larger than 100 Mbit/s). The data is memorized on the memory entity (e. g. miniature hard disc or future memory stick), which is placed within the UT terminal, After that the user may playback the content where he wants, and in time he wants, independently from further wireless  
15 access availability. The payment of the content goes by personal identification process via scrambled information sent by UT to PSD.
- b) A user passes near the PSD and pickup in walking by pressing the button at UT, within the seconds wanted newspaper or magazine, and read it where he  
20 wants, and when he wants, independently from further wireless access availability. The payment of the content goes by, personal identification process via scrambled information sent by UT to PSD.
- c) Sitting in the underground user downloads (payment obliged) content he  
25 wants, but in the same time he may chose one of a plurality of free of charge contents provided by the underground service company. Underground service company will have satisfied users, and take a payment for advertisement. Advertisement is included in free of charge content.
- 30 d) User passes near the PSD and pickup in walking by pressing the button at UT, (within the seconds) his personal information content. For example he takes all E-mails, or Video/Audio E-mail. or documents sent to him. In the same time by pressing the button he sends to PSD his E-mails, video E-mails

WO 01/97433

PCT/US01/18806

12

or other content to PSD. PSD takes this information and sends it further via internet. This service is free of charge, but make a majority of people interested to purchase UT, and after that to take a proprietary content by wireless 60 GHz system.

5

- e) User stands in front of PSD and make a classic audio or video telephony using UT, which is through fast internet connection further in real time provided to the addressed user. This service is not free of charge, but make a direct competition to mobile network service providers (3G). Due to the lower system cost and no infrastructure in background, the final price may be highly competitive.

10

- f) User has UT with play station capability and perform gaming against the PSD server during traveling by underground, by means of wireless. This service may be in underground or in train free of charge, but on the street or waiting in airport hall it may be charged.

15

- g) User has UT with play station capability and play against other user having UT with play station capability by wireless 60 GHz broadband link. This service is free of charge.

20

- h) User has UT and standing close to PSD is downloading internet information during waiting for his bus. This service is free of charge.

25

- i) User is driving the car and during waiting for the green light he is downloading content of the interest, by using 60 GHz communications

- j) User is driving through "Drive-In" restaurant or fuel tank station and during the waiting time for obtaining services, he is connecting to 60 GHz PDS and picks up specific content.

30

- k) During a visit to the general store or airport (large indoor environment with public access) user takes content from 60 GHz PDS unit. Large store and for

WO 01/97433

PCT/US01/18806

13

example airport axe offering free of charge navigation service for their environments and entertainment program.' Content provided for user may be also free of charge, but aligned with commercials, coming from owner of the PSD unit.

5

1) By giving to user free of charge UT or TRF, to obtain only selected (limited by provider of the free terminal) content,

m) While buying some snacks in small 24-hours convenience store, user picks up some information / entertainment content (using 60 GHz means) from indoor PDS unit to his UT or TRF.

10

WO 01/97433

PCT/US01/18806

14

**CLAIMS:**

1. Wireless transmission system designed for the transmission of data in the 60 GHz range,  
5 the system comprising:
  - a public download server connected to an information source, and
  - a mobile terminal provided with a narrow beam antenna.
2. System according to claim 1,  
10 characterized in that the communication range is 20 meters or less.
3. System according to claim 1,  
characterized in that the public download server is connected to a broadband data highway or a main server by means of an optical cable.  
15
4. System according to claim 1,  
characterized in that the public download server is connected to a broadband data highway or a main server by means of a wireless point-to-point connection.  
20
5. System according to claim 1,  
characterized in that the public download server is connected to a broadband data highway or a main server by means of a point-to-multipoint wireless local loop connection.  
25
6. System according to claim 1,  
characterized in that the public download server and the mobile terminal are designed for a dual frequency operation, one transmission frequency being the 60 GHz range and a second transmission frequency being an intermediate frequency below the 60 GHz range.  
30
7. System according to claim 1,

WO 01/97433

PCT/US01/18806

15

characterized in that the public domain server is provided with a wide angle beam antenna.

8. System according to claim 1,  
5 characterized in that the public domain server is provided with an antenna with a kidney shaped beam in cross-section.
9. System according to claim 1,  
10 characterized in that the public domain server and the mobile terminal are designed exclusively for uploading/downloading content from the public domain server to the mobile terminal.
10. Wireless transmission system designed for the transmission of data in the 60 GHz range,  
15 the system comprising:  
- a fixed hub provided with a wide angle beam antenna, and  
- a mobile terminal provided with a narrow beam antenna.
11. System according to claim 10,  
20 characterized in that the communication range is 20 meters or less.
12. System according to claim 10,  
characterized in that the fixed hub is connected to a broadband data highway or a main server by means of an optical cable.  
25
13. System according to claim 10,  
characterized in that the fixed hub is connected to a broadband data highway or a main server by means of a wireless point-to-point connection.
- 30 14. System according to claim 10,  
characterized in that the fixed hub is connected to a broadband data highway or a main server by means of a multipoint wireless local loop connection.



WO 01/97433

PCT/US01/18806

16

15. System according to claim 10,  
characterized in that the fixed hub and the mobile terminal are designed for a  
dual frequency operation, one transmission frequency being the 60 GHz  
range and a second transmission frequency being an intermediate frequency  
below the 60 GHz range.
16. System according to claim 10,  
characterized in that the fixed hub is provided with an antenna with a kidney  
shaped beam in cross-section.
17. System according to claim 10,  
characterized in that the fixed hub and the mobile terminal are designed  
exclusively for downloading content from the fixed hub to the mobile  
terminal.
18. Wireless transmission system designed for the transmission of data in the 60  
GHz range, the system comprising at least two mobile terminals respectively  
provided with a narrow angle antenna for communication with each other.
19. System according to claim 18,  
characterized in that the communication range is 20 meters or less.
20. System according to claim 18,  
characterized in that the mobile terminals are respectively provided with  
game software to enable the users to play games with each other by means of  
the mobile terminals.
21. System according to claim 18,  
characterized in that the mobile terminals are respectively designed for a dual  
frequency operation, one transmission frequency being the 60 GHz range and  
a second transmission frequency being an intermediate frequency below the  
60 GHz range.

WO 01/97433

PCT/US01/18806

17

22. Wireless transmission system,  
comprising a plurality of public access server and at least one mobile  
terminal, wherein the mobile terminal is designed to upload/download  
content from the public access server by means of a wireless transmission  
5 and the public download server all operate with the same transmission  
frequency in a non-licensed frequency band.
23. Wireless transmission system according to claim 22,  
characterized in that the communication between the mobile terminal and  
10 respectively a public access server is free of charge.
24. Wireless transmission system according to claim 22,  
characterized in that the uploading/downloading of content is charged to the  
user of the mobile terminal,  
15
25. Wireless transmission system according to claim 22,  
characterized in that there is no hand-over between adjacent public access  
server.
- 20 26. Method for uploading and/or downloading content from a public access  
server to/from mobile terminals over an air interface, wherein the air  
interface uses a non-licensed frequency band and the transmission itself is  
free of charge.
- 25 27. Method according to claim 26,  
characterized in that the user of a mobile terminal is charged for  
uploading/downloading content.
28. Method according to claim 26,  
30 characterized in that a service provider is owner of at least one public access  
server.
29. Method according to claim 26,

WO 01/97433

PCT/US01/18806

18

characterized in that the non-licensed frequency band is a 60 GHz band.

30. Method according to claim 26,  
characterized in that the public access server is installed in a large hall  
5 environment.
31. Method according to claim 26  
characterized in that the public access server is installed in public vehicles.
- 10 32. Method according to claim 26,  
characterized in that the public access server is installed facing sidewalks.
33. Method according to claim 26,  
characterized in that the public access server is installed at gas stations or  
15 traffic lights.

WO 01/97433

PCT/US01/18806

1/6

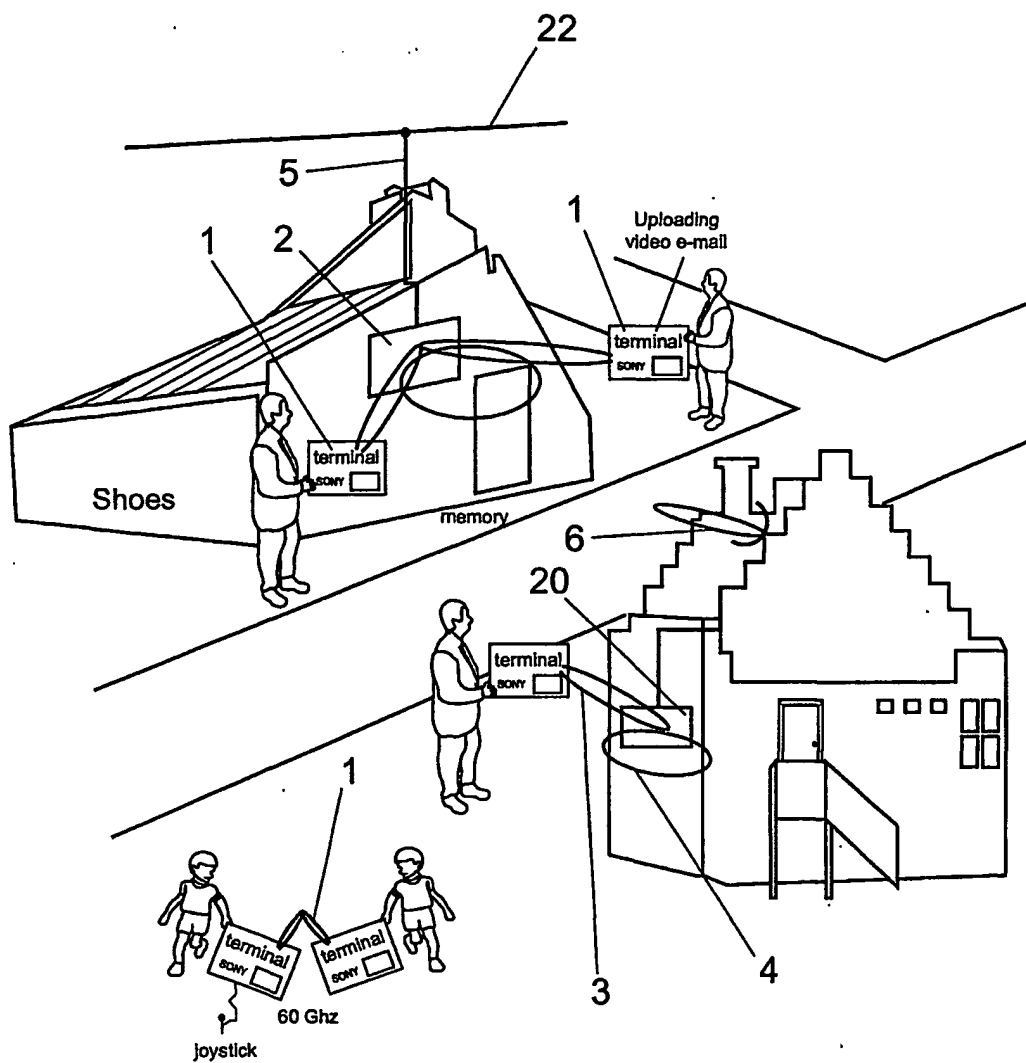
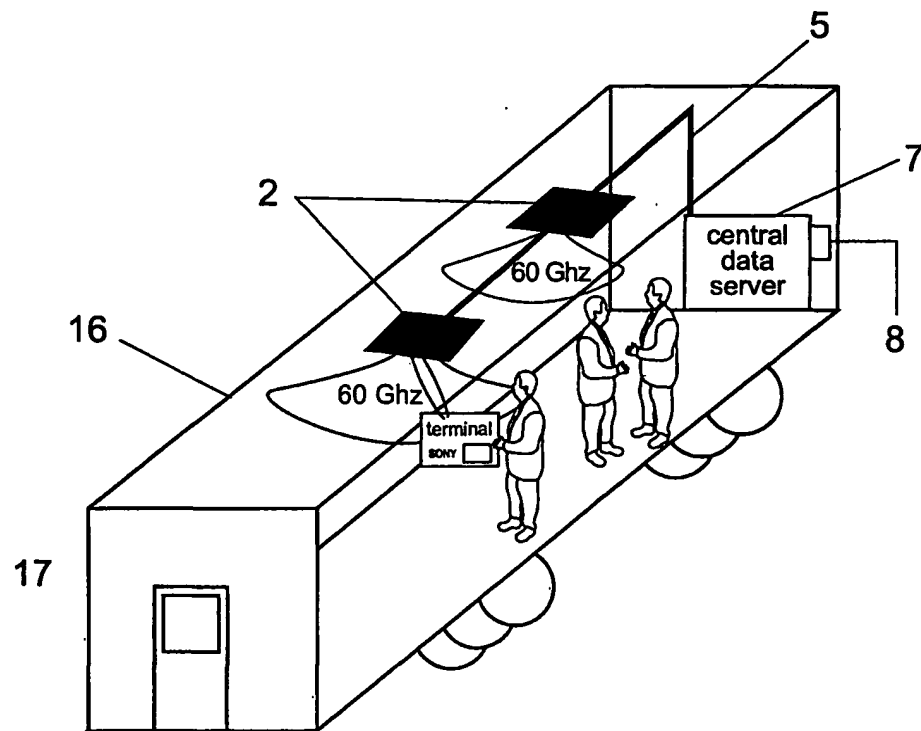


FIG. 1

WO 01/97433

2/6

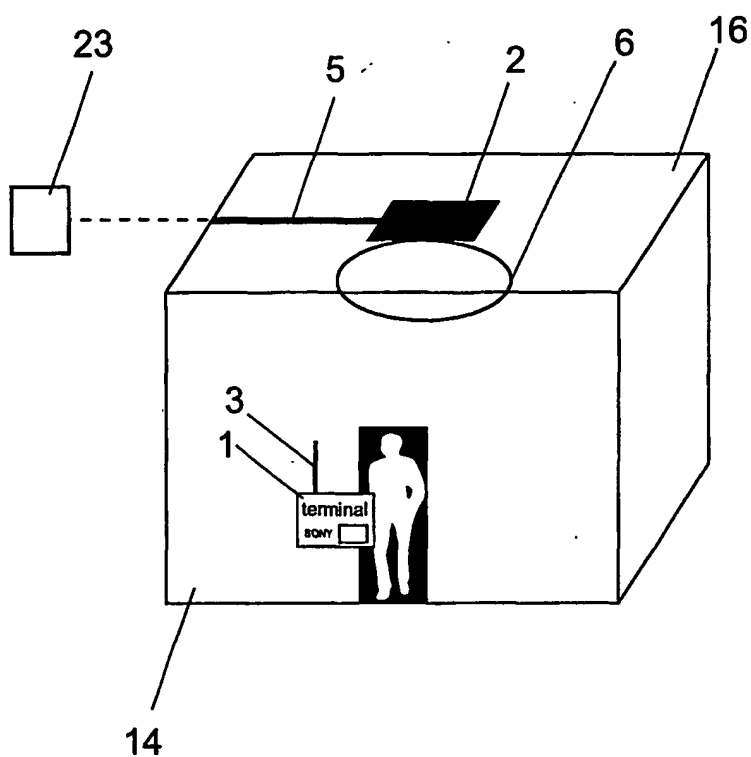
PCT/US01/18806

**FIG. 2**

WO 01/97433

3/6

PCT/US01/18806


**FIG. 3**

WO 01/97433

4/6

PCT/US01/18806

Side View

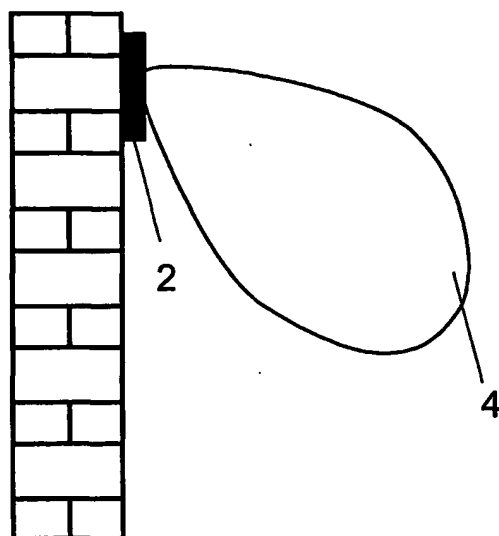

Top View

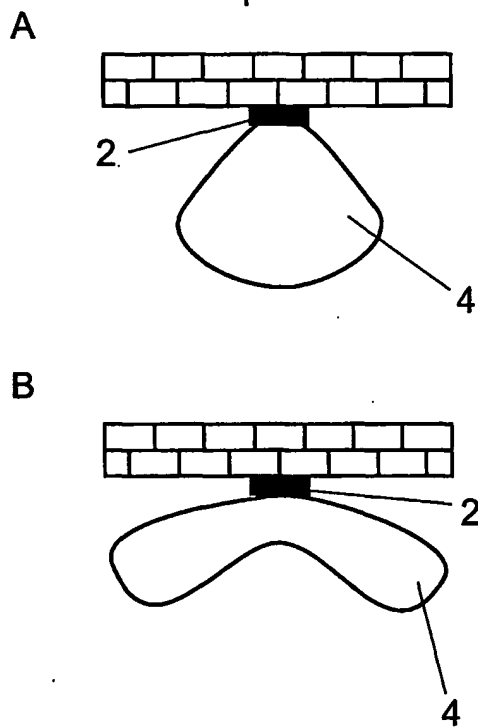



FIG. 4

WO 01/97433

PCT/US01/18806

5/6

Top View

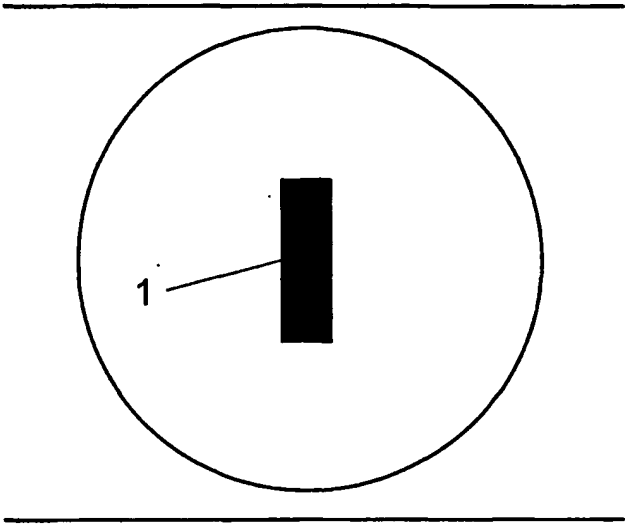

Side View

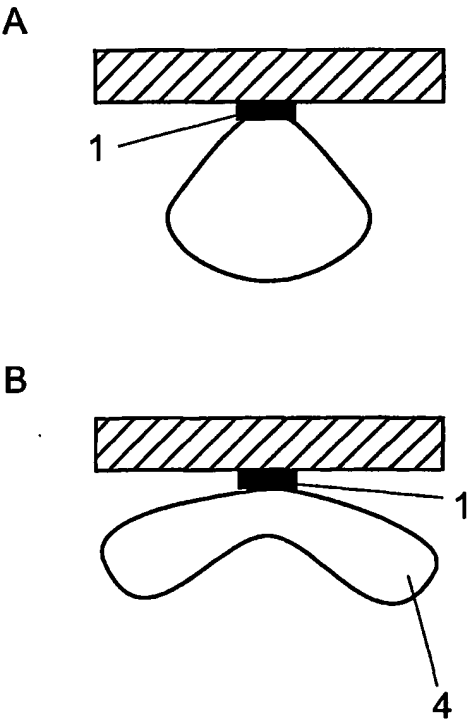


FIG. 5



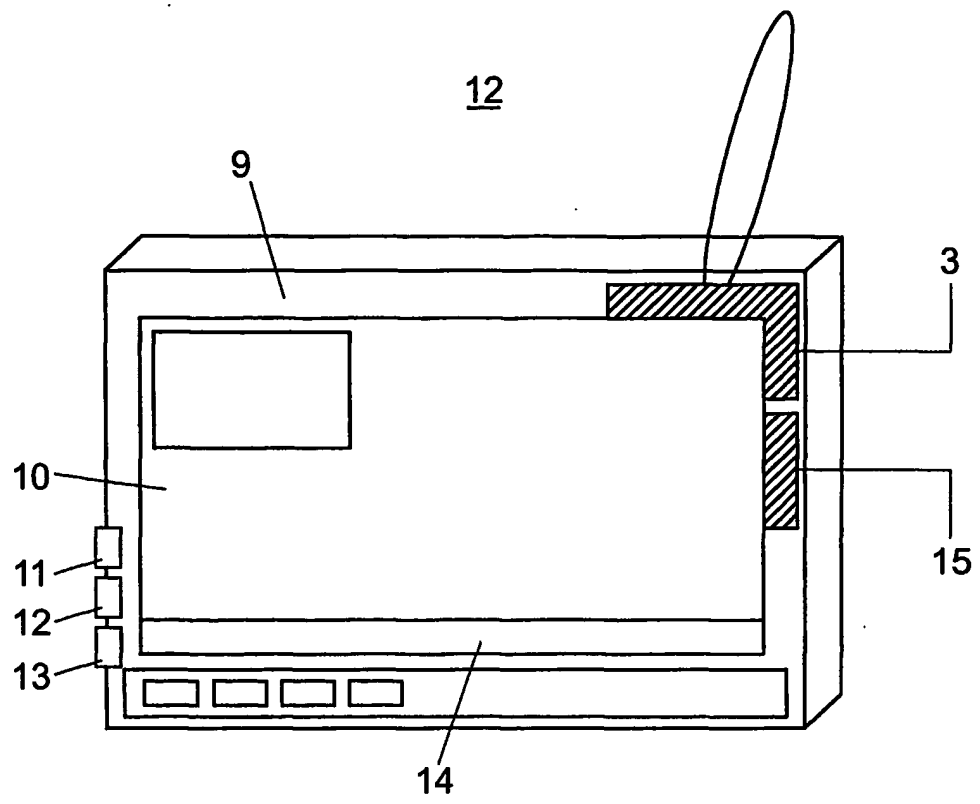


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**